


Lubricate all seals with clean hydraulic fluid prior to assembly.
Do Not Use Silicone Based Lubricants.

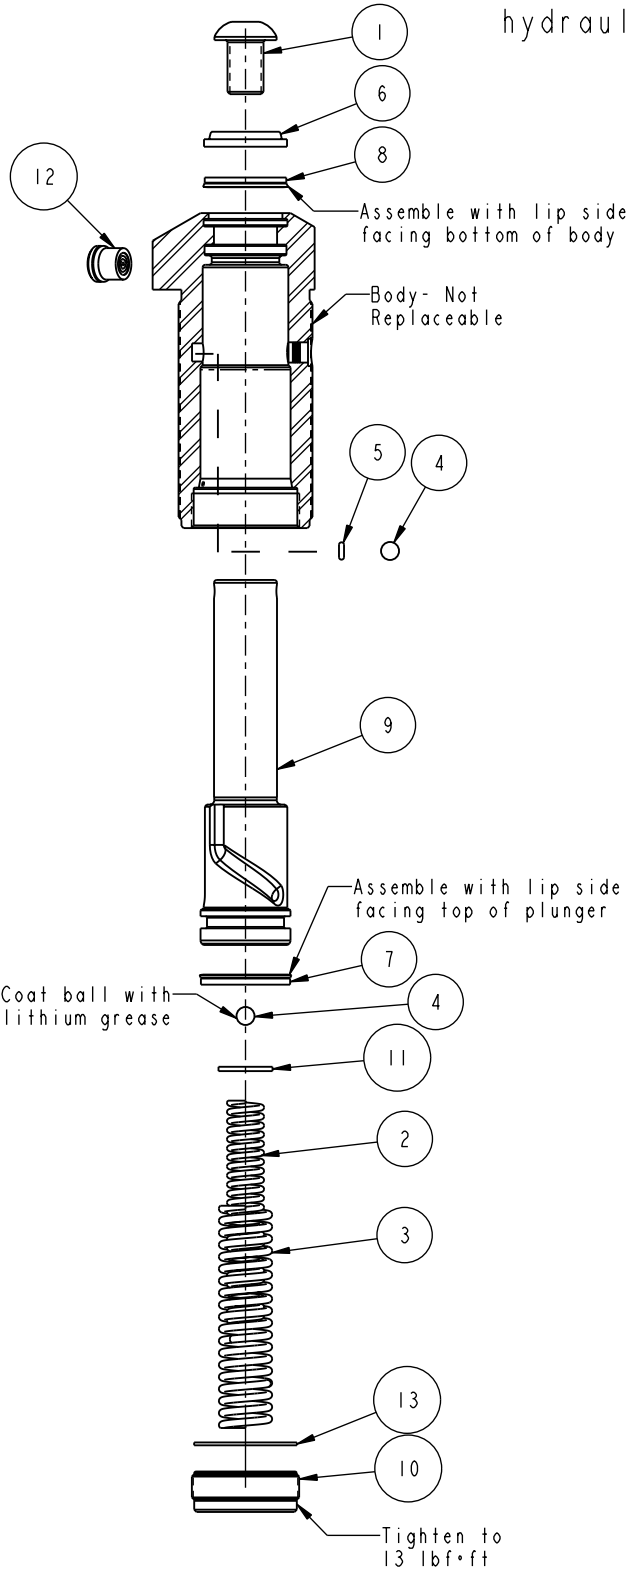

60-1501-13 Standard Seal Kit	6V-1501-13 Fluorocarbon Seal Kit	6I-1501-13 Spring Kit
23-6000-02(2ea)	23-6000-02(2ea)	23-6000-02(2ea)
39-0110-27	39-0520-12	23-3130-10
39-0110-46	39-0520-03	23-3130-09
39-0110-24	39-0530-00	81-5913-01
39-0000-20	39-0510-07	39-0000-20
39-T550-03	39-T550-03	39-T550-03

No.	QTY	PART No.	DESCRIPTION
13	1	39T55003	GASKET
12	1	92090001	ASSY, BREATHER, SAE #4
11	1	81591301	DISK, PIVOT, BALL, SC, 2600, SA
10	1	81531301	RETAINER, SC, 2600
9	1	81511301	PLUNGER, SC, 2600#
8	1	39011046	SEAL, BEVEL W/ HEEL INSERT, 7/8x1/8x1-1/4
7	1	39011027	SEAL, BEVEL, 1-1/16 x 3/32 x 1-1/4
6	1	39011024	SEAL, WIPER, SNAP-IN, (7/8)
5	1	39000020	O-RING
4	2	23600002	BALL, STEEL, ALLOY, .250
3	1	23313010	SPRING
2	1	23313009	SPRING
1	1	21410039	BUTTON HEAD CAP SCREW

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

Model Number
15-0113-11
15-0113-11F

PARTS LIST, ASSY, SC, TB, 2600, SA

SIZE
A

PL-1502

REV
J

FORM FEG035_PL_ASIZE, REV. A

J	2109	RELEASE	MES	10-12-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	VANDALSEM	DRAWING STATUS: Released		
DATE:	04-07-87	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

SHEET 1 OF 1