

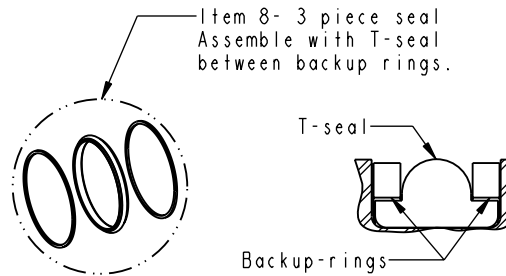


Lubricate all seals with clean hydraulic fluid prior to assembly.  
Do Not Use Silicone Based Lubricants.

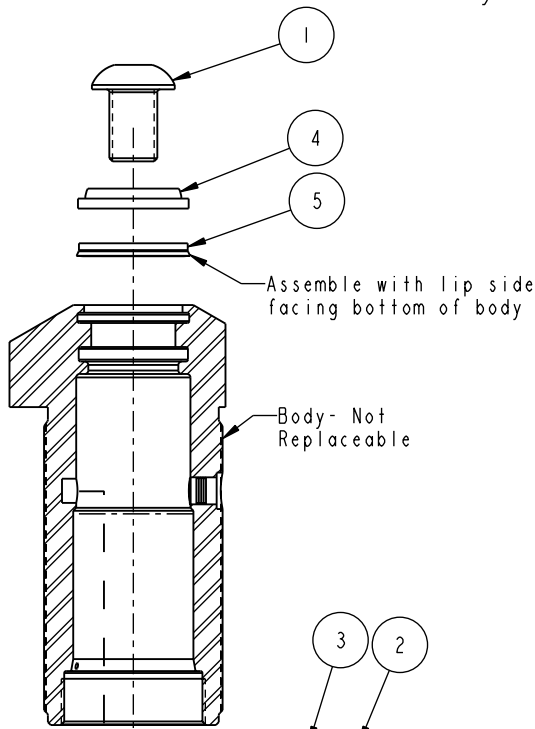

60-1502-13 Standard Seal Kit	6V-1502-13 Fluorocarbon Seal Kit
39-H110-30	39-V110-30
39-0110-46	39-0520-03
39-0110-24	39-0530-00
39-0000-20	39-0510-07
23-6000-02	23-6000-02
39-T550-03	39-T550-03

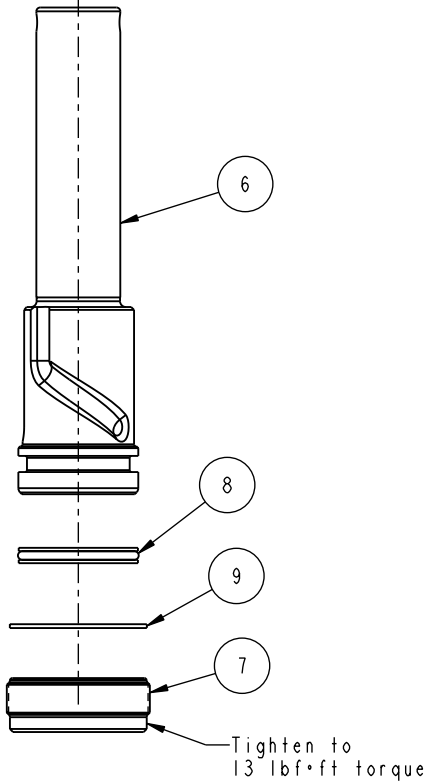

No.	QTY	PART No.	DESCRIPTION
9	1	39T55003	GASKET
8	1	39H11030	SEAL, T, PISTON, 1 1/16X5/32X1 1/4
7	1	81531301	RETAINER, SC, 2600
6	1	81511301	PLUNGER, SC, 2600#
5	1	39011046	SEAL, BEVEL W/ HEEL INSERT, 7/8x1/8x1-1/4
4	1	39011024	SEAL, WIPER, SNAP-IN, (7/8)
3	1	39000020	O-RING
2	1	23600002	BALL, STEEL, ALLOY, .250
1	1	21410039	BUTTON HEAD CAP SCREW

### PARTS LIST



VEKTEK, INC.  
1334 E. SIXTH AVE. P.O. BOX 625  
EMPORIA, KS. 66801 U.S.A.

Model Number  
**15-0213-11**  
**15-0213-11F**

PARTS LIST, ASSY, SC, TB, 2600, DA

SIZE  
A

**PL-1504**

REV  
K

FORM FEG035\_PL\_ASIZE, REV. A

K	2109	RELEASE	MES	10-12-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: VANDALSEM	DRAWING STATUS: <b>ECN</b>			
DATE: 04-07-87	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

SHEET 1 OF 1