
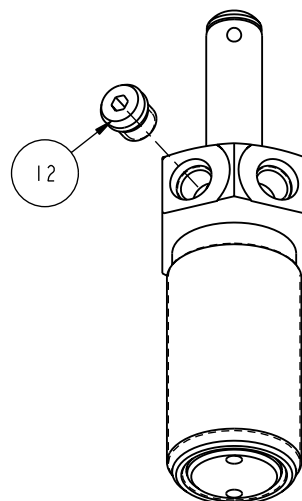


Lubricate all seals with clean hydraulic fluid prior to assembly.
Do Not Use Silicone Based Lubricants.

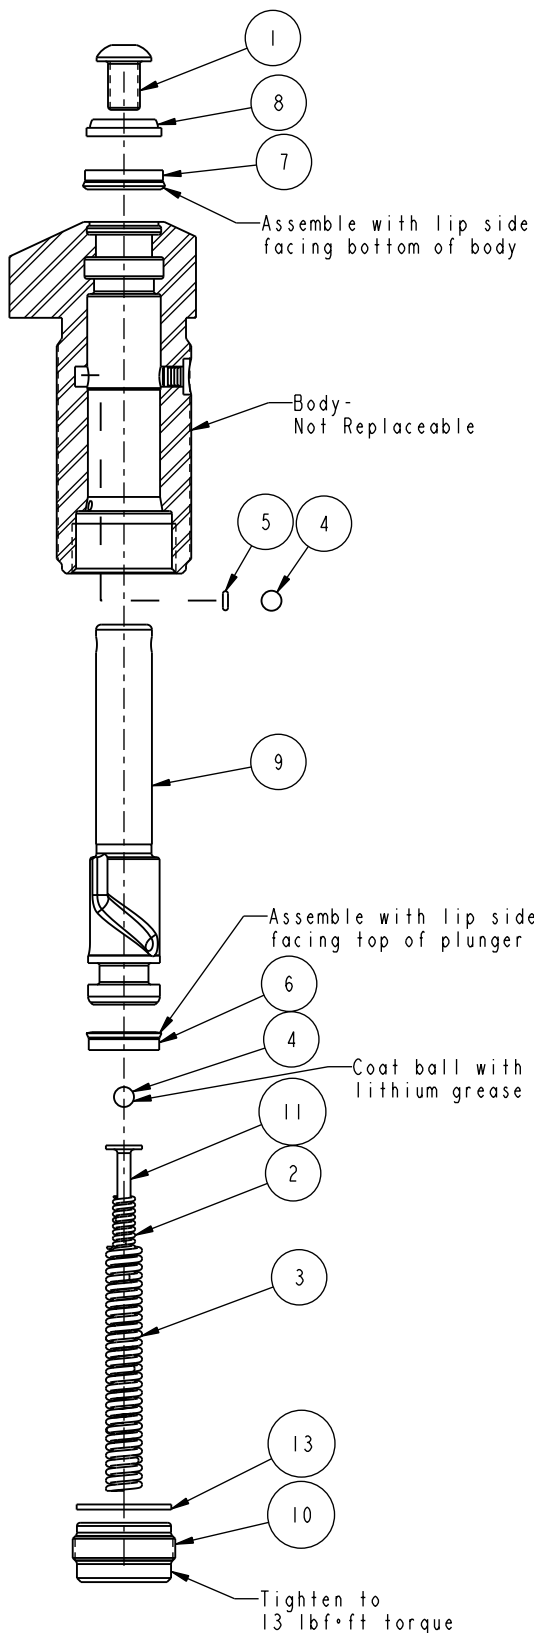

60-1501-05 Standard Seal Kit	6V-1501-05 Fluorocarbon Seal Kit	61-1501-05 Spring Kit
39-0100-36	39-0520-10	23-3100-08
39-0100-38	39-0520-14	23-3110-17
39-0100-39	39-0530-04	23-6000-14(2 ea)
23-6000-14(2 ea)	23-6000-14(2 ea)	39-T550-01
39-0000-32	39-0510-20	
39-T550-01	39-T550-01	

No.	QTY	PART No.	DESCRIPTION
13	1	39T55001	GASKET
12	1	91590001	BREATHER, SAE 2
11	1	81590501	ROD, SUPPORT, SPRING, SC, 450
10	1	81530500	RETAINER, SC, 450
9	1	81510500	PLUNGER, SC, 450
8	1	39010039	SEAL, WIPER, SNAP-IN, (7/16)
7	1	39010038	SEAL, BEVEL, 7/16 x 3/32 x 5/8
6	1	39010036	SEAL, BEVEL, 3/8 x 3/32 x 9/16
5	1	39000032	O-RING
4	2	23600014	BALL, STEEL, ALLOY, .156
3	1	23311017	SPRING
2	1	23310008	SPRING
1	1	21411001	BUTTON HEAD CAP SCREW

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

Model Number
15-0105-00
15-0105-00F

PARTS LIST, ASSY, SC, TB, 450, SA

SIZE
A
PL-1510 REV
L

FORM FEG035_PL_ASIZE, REV. A

L	2109	RELEASE	MES	10-12-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	VANDALSEM	DRAWING STATUS: Released		
DATE:	02-04-88	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

SHEET 1 OF 1