
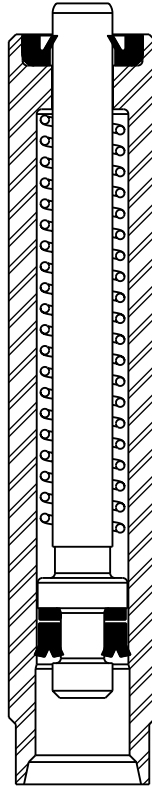
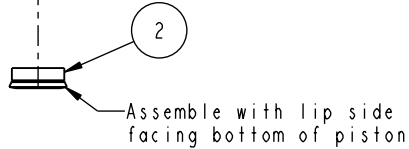
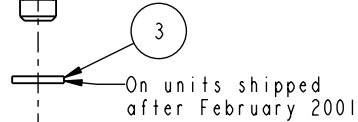
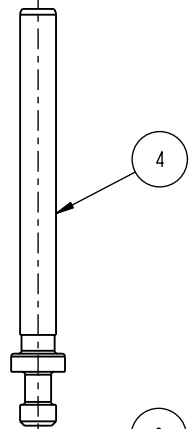



Lubricate all seals with clean hydraulic fluid prior to assembly.
Do not use silicone based lubricants.

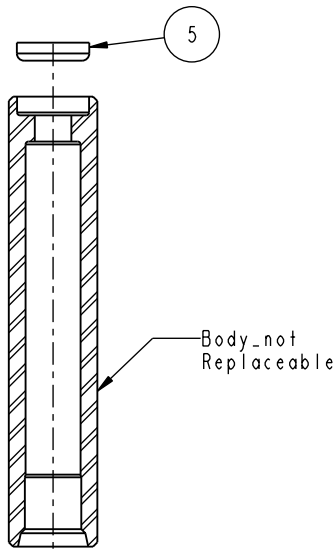

Standard Seal Kit 60-2001-04	Fluorocarbon Seal Kit 6V-2001-04	Spring Kit 61-2004-04
39-V100-29	39-V100-29	23-3110-27
39-0100-11	39-V100-11	
39-0540-09	39-0540-09	

No.	QTY	PART No.	DESCRIPTION
5	1	39V10029	WIPER, PRESS-IN
4	1	82010404	PISTON, CYL, 550, 1.25 STRK
3	1	39054009	RING, BU, (-106)
2	1	39010011	SEAL, BEVEL, 3/16 X 3/32 X 3/8
1	1	23311027	SPRING

PARTS LIST	 VEKTEK VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
	Model Number 20-0104-12 20-0104-12F

G	2111	RELEASE	MES	10-19-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JACOB	DRAWING STATUS: Released		
DATE:	11-04-94	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

Model Number 20-0104-12 20-0104-12F		ASSY, CYL, TB, 550, 1.25 STRK, SA	
SIZE	PL-2075	REV	G
A			

FORM FEG035_PL_ASIZE, REV. A