
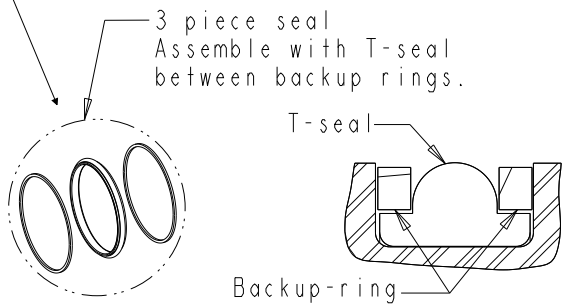
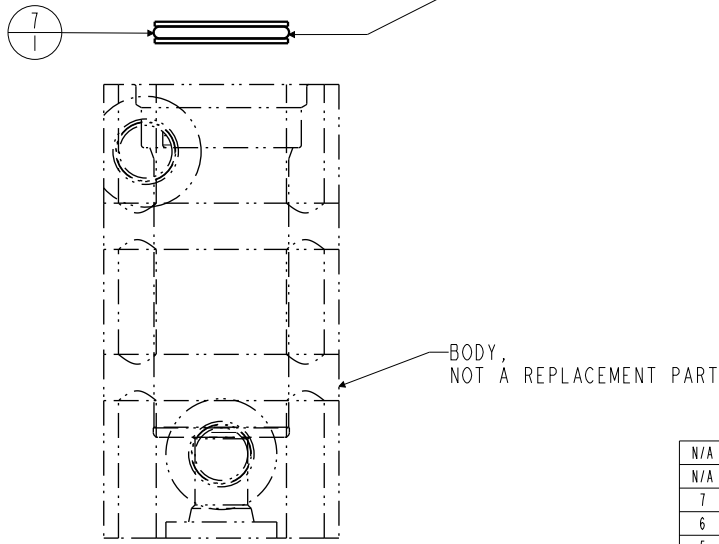
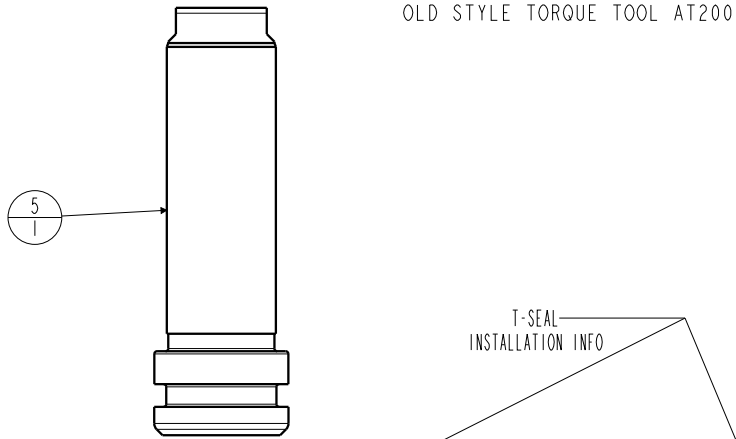


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY. DO NOT USE SILICONE BASED LUBRICANTS.

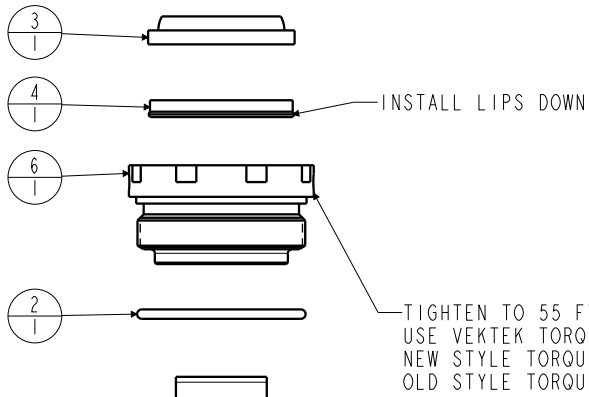

No.	QTY	PART No.	DESCRIPTION	Std Seal Kit	FKM Seal Kit
N/A	N/A	6V200209	SEAL KIT, FKM		NOTED
N/A	N/A	60200210	SEAL KIT, STANDARD	NOTED	
7	1	39H10017	SEAL, T, (13/16 X 5/32 X 1)	X	39V10017
6	1	82031002	GLAND, CYL, 3900 & 17.8 KN		
5	1	82011007	PISTON, CYL, 3900, 1.5 STRK		
4	1	39011045	SEAL, LL, (13/16 X 1/8 X 1/8 X 1-1/16)	X	39012005
3	1	39011018	WIPER, SNAP-IN, (13/16)	X	39012008
2	1	39001011	O-RING, (-024)	X	39012013
1	1	30601144	PLUG, SOCH, SAE 4		

PARTS LIST

(WEIGHT 2.78 LBS)

VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED

20121004

20121004F

PARTS LIST, ASSY, CYL, BB, 3900, 1.5 STRK, DA

SIZE A

PL2088

REV G

G	4701	RELEASE	RLK	6/6/22
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JACOB	DRAWING STATUS: Released		
DATE:	06/24/96	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		