


APPLY LUBRICANT TO ALL SEALS PRIOR TO INSTALLATION  
DO NOT USE SILICONE TYPE LUBRICANTS.



No.	QTY	PART No.	DESCRIPTION	Included in Repair Kit
N/A	N/A	62707003	KIT, REPAIR, SWITCH, PRESS	
10	1	97075005	ASSY, SWITCH, PRESS, M8	X
9	1	87075010	ADJUSTER, SWITCH, PRESSURE, SEVERE	
8	1	87075007	COLLAR, SWITCH, PRESSURE	
7	1	87075001	SHIM, ENDED, DOUBLE	
6	1	39053003	WIPER, PRESS-IN, (1)	
5	1	39051075	O-RING, (24.5mm x 1.5)	
4	1	39050026	O-RING, (-018)	X
3	1	39000070	O-RING, (-904)	X
2	1	23350015	SPRING, COMPRESSION	
1	1	21440022	SHSS, CUP POINT	

### PARTS LIST

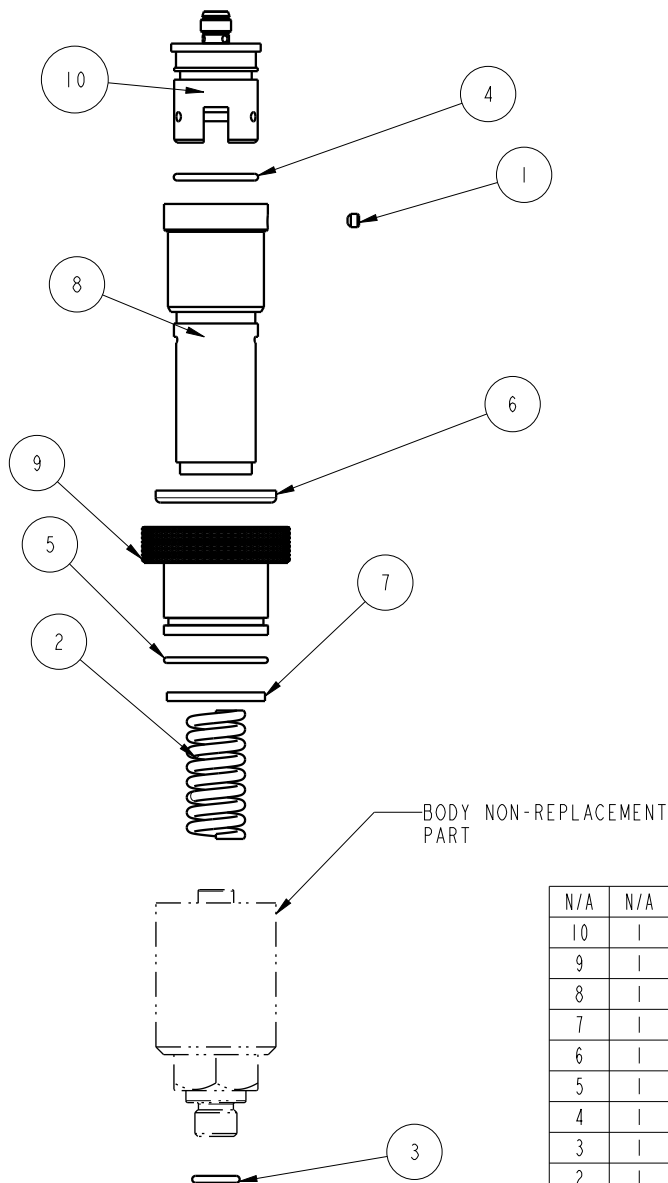

VEKTEK, INC.  
1334 E. SIXTH AVE. P.O. BOX 625  
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED  
70-7500-74

PARTS LIST, ASSY, SWITCH, PRESS, M8 MALE

SIZE A PL7178

REV B

SHEET 1 OF 1

B	3586	RELEASE	NPETERS	09/26/18
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	DRAWING STATUS: <b>Released</b>			
DATE:	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

FORM FEG035\_PL\_ASIZE, REV. B