



# Valves



## In-Line Flow Control

### Precision Flow Control

- Precision flow adjustment with 0.4 mm pitch needle valve.
- Protect sensitive components from excessive flow.
- For single component or system control.
- Flow controls used as meter-in devices in clamping systems to prevent damage.
- Flows up to 11.3 l/min at 350 bar (35 MPa) maximum pressure.
- Check valve for reverse free flow.
- Stainless steel inner valve construction.
- Fluorocarbon seals are standard.
- Locking adjustment knob preventing change in flow.



H-7

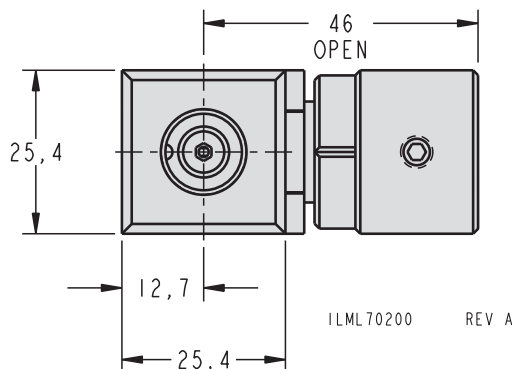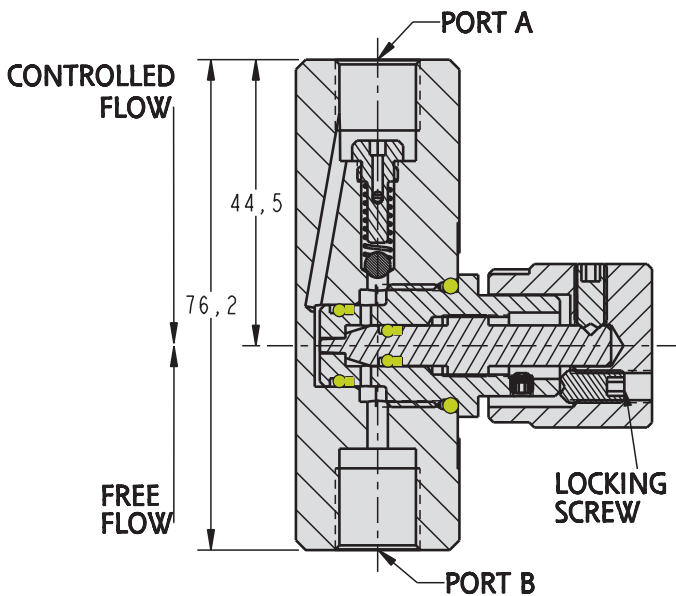

### In-Line Flow Control

Model No.	L7-0200-14
Port A	G 1/4
Port B	G 1/4

