
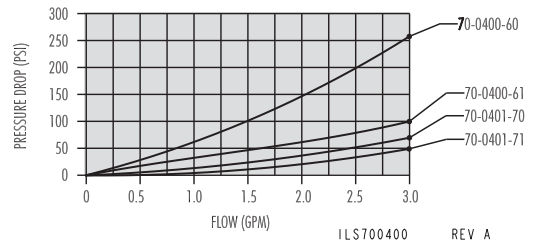


Accessory Valves

In-line Filters, Basic Filters and Filter Screens

In-line Filter

- Available in two port sizes and two filter ratings.
- Filters at 5,000 psi in either direction.
- Compact in-line design for maximum flexibility.
- Protects sensitive valves and devices from contamination.
- Serviceable for cleaning or filter replacement.
- Maximum flow 3 gpm.
- Maximum ambient temperature of 200° F.
- Can also be used for in-line application.

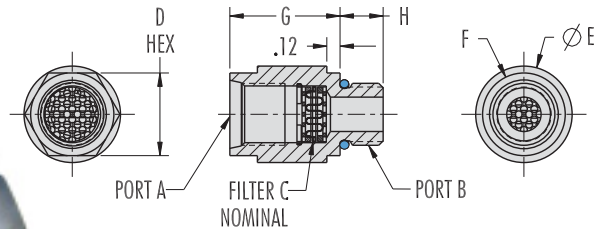


In-line Filter Dimensions

Model No.	A	B	C	D	E	F	G	H
70-0400-60	SAE 4	SAE 4	10 Micron	0.63	0.75	0.63	0.88	0.35
70-0400-61	SAE 4	SAE 4	25 Micron	0.63	0.75	0.63	0.88	0.35
70-0401-70	SAE 6	SAE 6	10 Micron	0.75	0.88	0.75	1.00	0.39
70-0401-71	SAE 6	SAE 6	25 Micron	0.75	0.88	0.75	1.00	0.39

Screen replacement kits available.
Call factory for details

Adapter Filter

- Installs easily into SAE 6 Quick Disconnect.
- Installs into Quick Disconnects of Pallet Decouplers providing extra filtration.

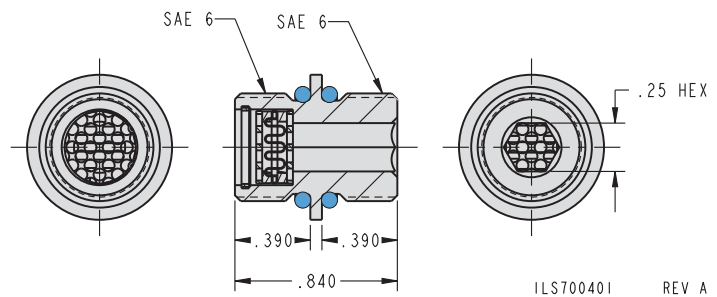


Adapter Filter

Model No.	Filtration
70-0407-71	25 Micron

In-port Filter

- Installs easily into SAE 6 manifold ports.
- Installs in manifold ports of Pallet Decouplers for additional filtration.

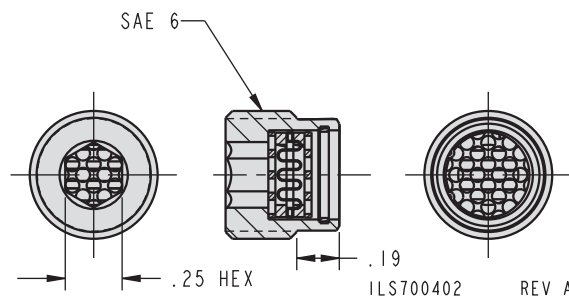

In-port Filter

Model No.	Filtration
70-0437-71	25 Micron

M-7




Accessory Valves

Check Valves

Basic Filter

- Keeps chips and debris from reaching valves or other sensitive devices.
- Traps contaminants which may have been missed when cleaning tubing or blind holes prior to fixture startup.
- Easily cleaned or changed filter should be checked when devices become sluggish.

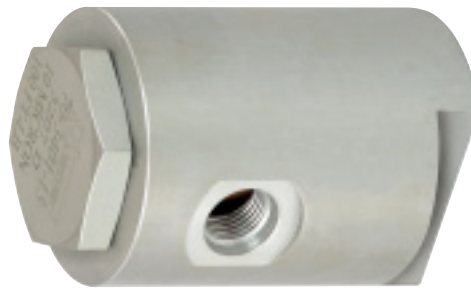


Basic Filter

Model No.	Filtration
70-3401-15	10 Micron
70-3401-12	25 Micron

Basic Filter Pressure Drop

Gal/Min	25 Micron	10 Micron
1	2	2.2
2	7	7.7
3	10	11
4	15	16.5
5	20	22
6	26	28.6
7	33	36.3

Screen replacement kits available.
Call factory for details

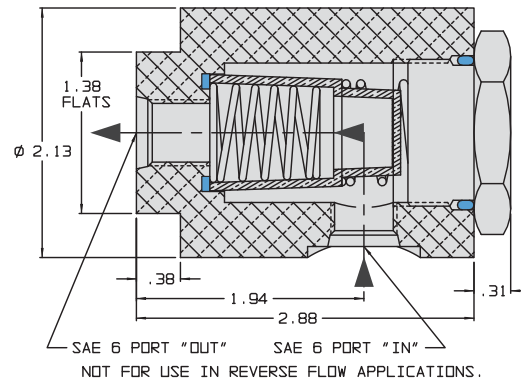

MAXIMUM OPERATING PRESSURE: 5000 PSI
MAXIMUM AMBIENT TEMPERATURE: 200° F

ILS703402 REV D

In-line Filter Screens


SAE 4 Filter Screen

- Protects valves and devices installed at pump.
- Catches damage causing chips.
- Can be used in in-port applications.




In-line Filter Screens

Model No.	Port
70-3405-44	SAE 4
70-3405-66	SAE 6

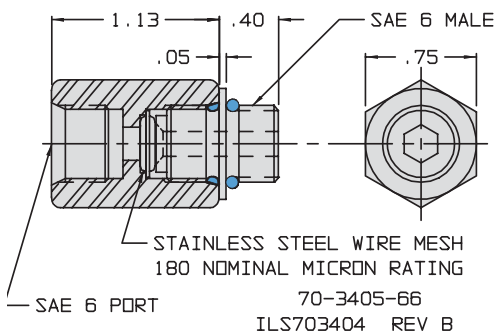

SAE 6 Filter Screen

- Protects devices and individual valves.
- Catches damage causing chips.
- Can be used in in-port applications.

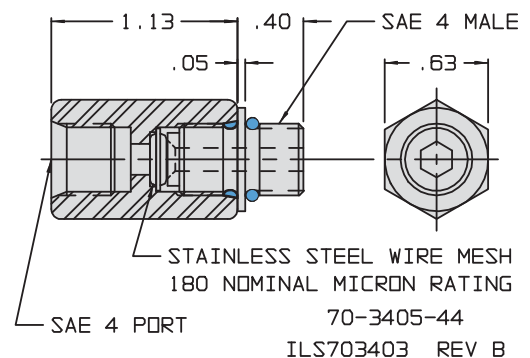

M-8

