
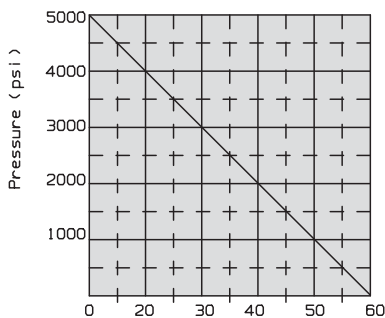


Power Supplies


Air/Hydraulic Pump

Compact Air/Hydraulic Pump

- Suitable for most single fixtures and small pallet systems.
- Powers either single or double acting cylinders.
- Any one of our D03 valves can be mounted directly on the pump, no external sub-plate is necessary on most systems, or remotely by external plumbing.
- Flow rates up to 90 cu. in. per minute. Position devices quickly then pressure builds to preset operating range.
- Built in air regulator adjusts to determine hydraulic output pressure from 1,200 to 5,000 psi.
- Mounting hardware is included.
- Noise level, 80 Db at 4 feet.

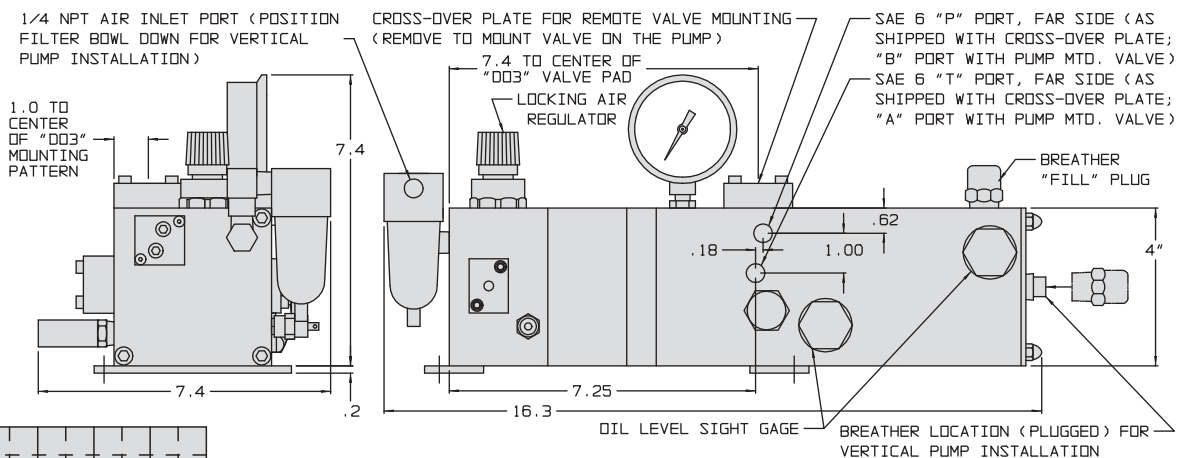

Flow rate (cu in/min)
at 90 PSI Air Input
ILS552001 REV D

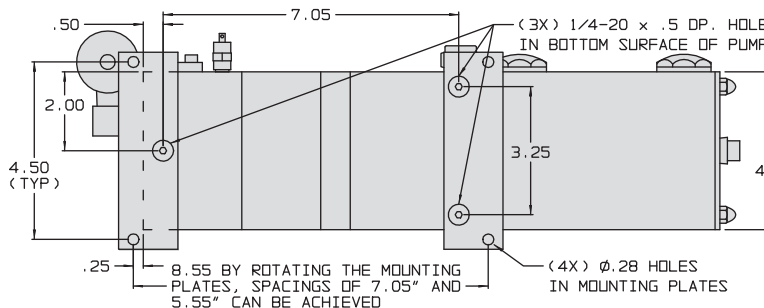

BOTTOM VIEW MODEL# 55-2056-00

ILS552000 REV F

Model No.	Reservoir Capacity	Minimum Air Input (psi)	Maximum Air Input (psi)	Maximum Air Output (psi)	Operating Pressure Range	Mounting Options	Anodized Aluminum Weight
55-2056-00	Horizontal 68 cu. in.	50	120	100	1200 to 5000 psi	Horizontal (as shown)	19 lbs.
55-2056-00	Vertical 80 cu. in.	50	120	100	1200 to 5000 psi	Vertical (Reservoir up, filter bowl down)	19 lbs.

WARNING! The use of spool valves invalidates the warranty on VektorFlo® pumps.

