




# Miscellaneous Plumbing

## Rotating Union, 4 Path

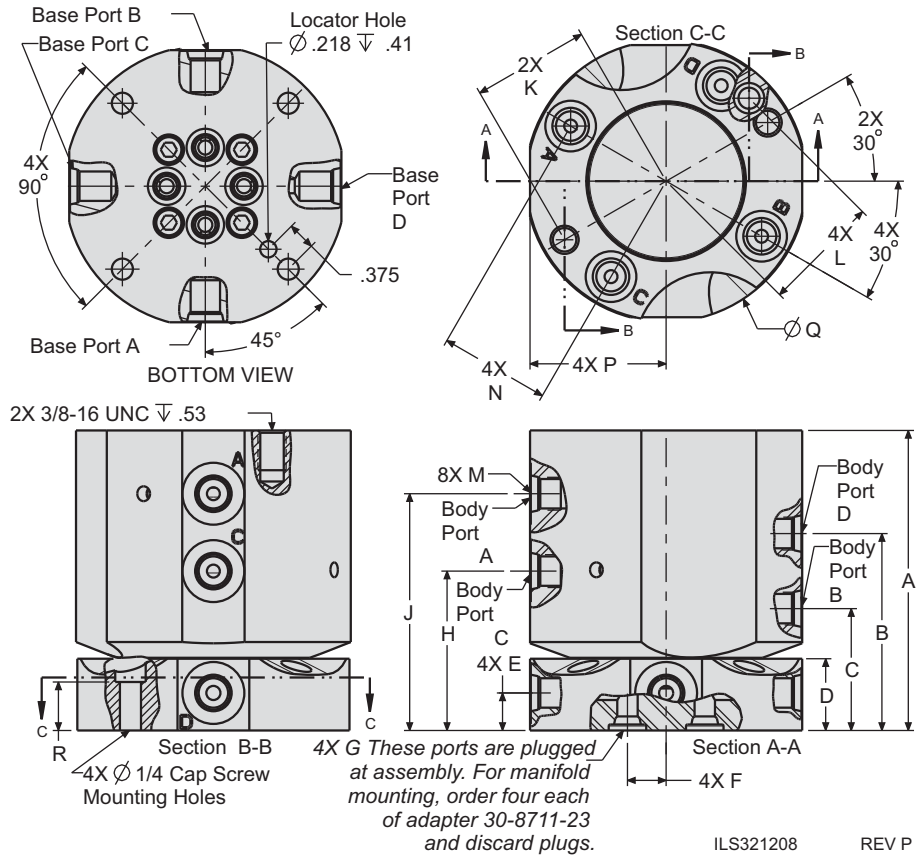

### Operating Parameter Guidelines



- Max Temperature: 40°-160° F.
- Max RPM see table page I-3.
- Rotational torque required when no ports pressurized: 50 in-lbs.
- Max rotational torque required when ports are pressurized to 5,000 psi: 180 in-lb.
- Torque requirements may vary depending on port configuration and pressure run through ports.
- Testing your specific application may be required.
- Air may be run in any available passage.

ILS321208 REV P

For proper sealing, mating surface must be flat within 0.003 in. with a maximum 32  $\mu$  in.  $R_a$  surface finish.

## Dimensions

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
<b>Four adapters, Model No. 30-8711-23, are needed for manifold mounting (see drawing). Order separately.</b>																
32-4244-01	4.00	2.65	1.65	0.96	0.50	0.52	SAE 2	2.15	3.15	1.56	1.56	SAE 4	1.47	1.81	3.75	0.65
32-4264-01	4.50	3.01	1.81	1.08	0.56	0.52	SAE 2	2.41	3.61	1.69	1.75	SAE 6	1.52	1.94	4.00	0.79

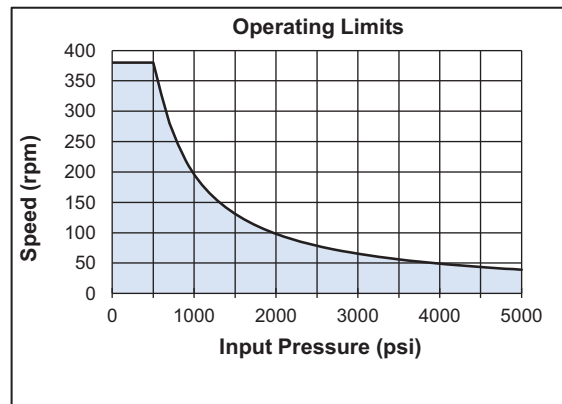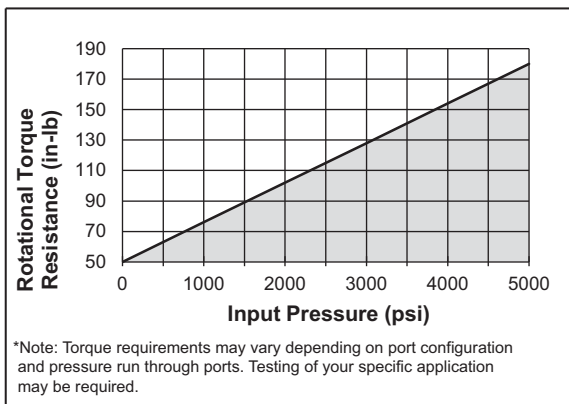

ILS321213 REV B



# Miscellaneous Plumbing

## Rotating Unions

### Standard Features Single, Dual, Quad, 6, 8 and 12 Flow Path Models

Rotating unions are a rotary connection, feeding pressure to fixtures while allowing full 360° rotation of the fixture with or without pressure. A machine or independent indexer may do this indexing. Rotating unions allow “live” hydraulic power to be supplied to fixtures during the machining cycle.

- Single, dual, quad, 6, 8, and 12 path models are available to fit your application.
- SAE 6 models are required for major fluid distribution and all remote valve systems. SAE 4 models may be used on double acting systems and small single acting systems where speed of retraction is not critical.
- Most units may be either manifold mounted or used with standard fittings.

The leak free design eliminates the need for a drain or vent line required by standard industrial models. This feature also reduces the demand for pressure present in industrial models that can cause pump cycling.

All units include internal bearings to increase life under loaded applications. Quad path models are often installed in machine doors to feed two independent dual path models on fixtures, making VektorFlo® the choice for all of your machine clamping needs. Integral mounting holes and multiple plumbing options make VektorFlo® designs easier to use than specialized larger industrial model.



### Maximum RPM at Various Pressures with Petroleum Based Fluids

Model No.	Configuration	500 psi	1000 psi	2000 psi	3000 psi	4000 psi	5000 psi
32-1261-00	Single Path	915	460	230	150	115	90
32-1241-00	Single Path	460	230	115	75	60	50
32-1261-01	Single Path	380	190	95	65	50	40
32-1461-41	Single Path	380	190	95	65	50	40
32-2242-00	Dual Path	380	190	95	65	50	40
32-2262-00							
32-2242-01							
32-2262-01							
32-4244-01	Quad Path	380	190	95	65	50	40
32-4264-01							
32-6246-00	6 Path	180	140	80	50	40	30
32-6246-01							
32-6246-00	6 Path with Slip Ring	100	100	80	50	40	30
32-6246-01							
32-8248-00	8 Path	180	140	80	50	40	30
32-8248-01							
32-8248-00	8 Path with Slip Ring	100	100	80	50	40	30
32-8248-01							
32-1224-12	12 Path	150	110	60	40	30	20
32-1224-13							
32-1224-12	12 Path with Slip Ring	100	100	60	40	30	20
32-1224-13							

ILS321200 REV G

