
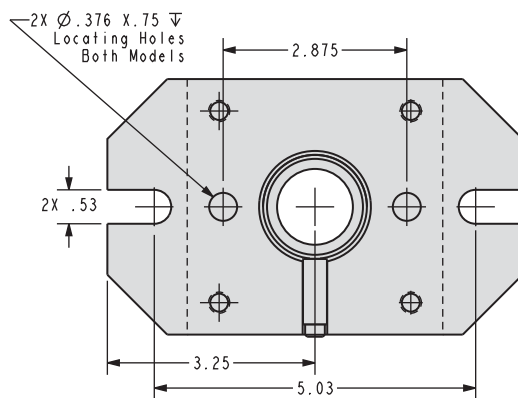
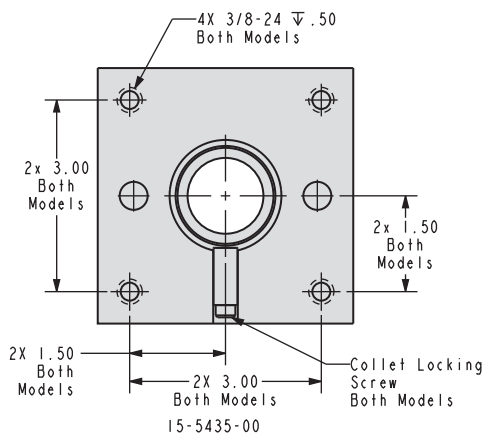
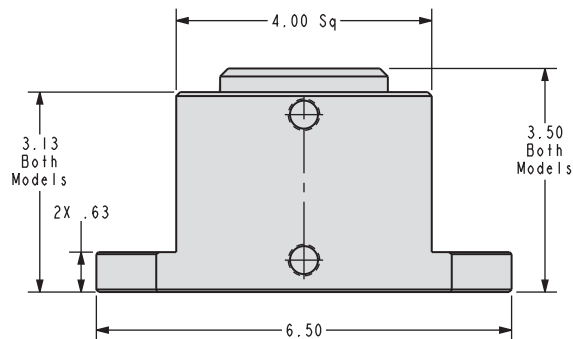


# Special Use Clamps

## Air Powered Collet Vise

### Double Acting Single Collet Styles Only

- Compact design yields 750 lb. collet closing force at 100 psi air line pressure.
- Concentric piston pulls the standard 5-C collet on centerline.
- Available with or without mounting flange for easy fastening from either top or bottom.
- Through hole design allows you to feed bar stock (1.062" maximum diameter) from the bottom of the collet for high production applications.
- Lightweight, only 5 lbs.

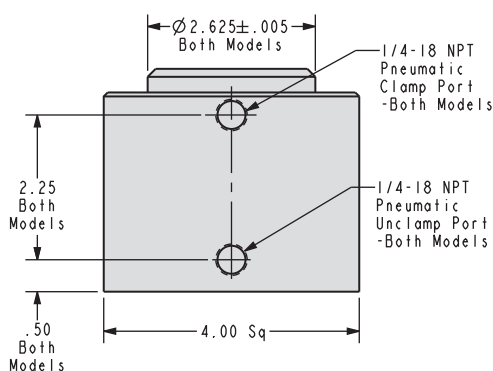

15-5435-01

ILS155400

REV H

Model No.	Base Style	Approximate Radial Clamp Force Per Station (lb)*	Approximate Downward Clamp Force Per Station (lb)*	Weight
<b>Double Acting (D/A) Collet Closer, actuated pneumatically both directions.</b>				
15-5435-00	Square	2250	750	4.5
15-5435-01	Flange Mount	2250	750	5.0

\* 100 psi air pressure with a  $\varnothing 0.500$  collet



NOTE: Do not exceed 150 psi maximum inlet pressure