

# Accessory Valves


## Flow Control and Check Valves

### Precision Flow Control

- Precision flow adjustment with 0.4 mm pitch needle valve.
- Protect sensitive components from excessive flow.
- For system control.
- Flow controls used as meter-in devices in clamping systems to prevent damage.
- Flows up to 11.3 l/min at 350 bar maximum pressure.
- Check valve for reverse free flow.
- Stainless steel inner valve construction.
- Fluorocarbon seals are standard.
- Locking adjustment knob preventing change in flow.



In-line Flow Control		
Model No.	A Port	B Port
47-0200-14	G 1/4	G 1/4

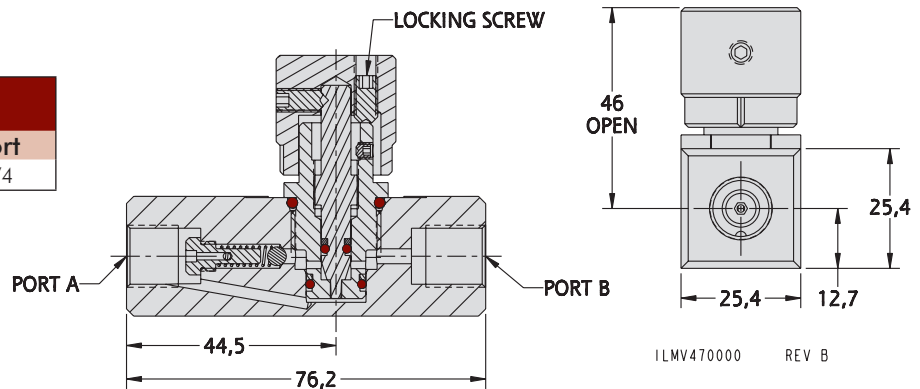


### Check Valves

Permits flow in one direction only.  
Cannot be adjusted for reverse flow.



Check Valve	
Model No.	Port
47-0340-01	G 1/8
47-0340-11	G 1/4

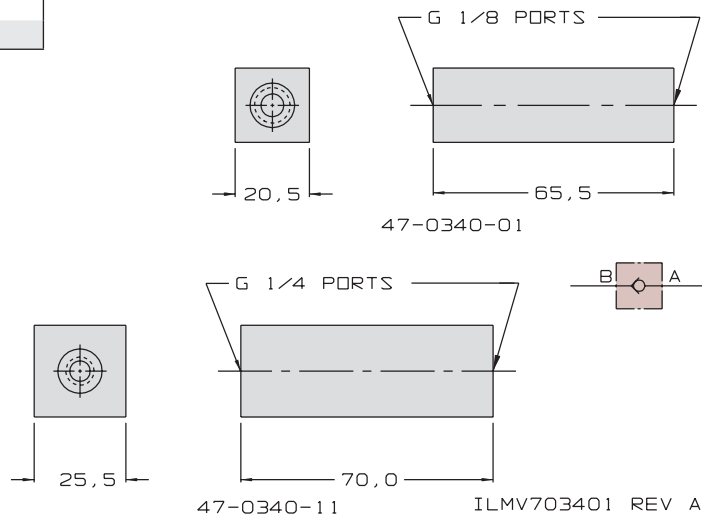

M-2