


Accessory Valves

Gauges, Filters, Relief

Standard Gauges

- Liquid filled gauges up to 700 bar (70 MPa) analog readouts.
- Conform to ANSI standard B40.1 Grade B. G 1/8 or G 1/4 connections.

Gauges					
Model No.	Pressure Range	A	B	C	D
47-2210-00	0-350 bar	107	G 1/8	69	4.7
47-2210-01	0-700 bar				
47-2210-02	0-350 bar	106	G 1/4	69	11
47-2210-03	0-700 bar				





To extend the life of Pressure Gauges, run your system at no more than **75%** of the gauge scale.



In-line Filter

- Available in 2 filter ratings; 10 and 25 Micron.
- Filters at 350 bar (35 MPa) in either flow direction.
- Compact in-line design for maximum flexibility.
- Serviceable for cleaning or filter replacement.
- Maximum flow of 11.3 l/minute.
- Maximum ambient temperature of 93° C.

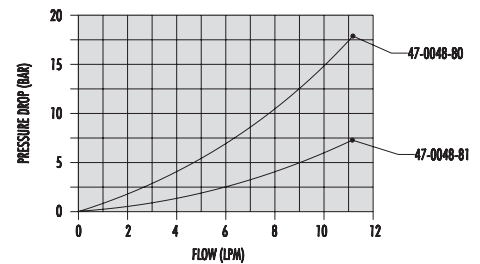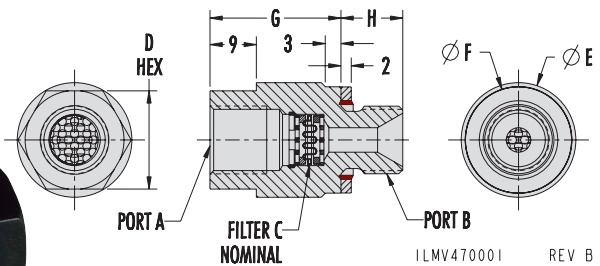


In-line Filters								
Model No.	A	B	C	D	E	F	G	H
47-0048-80	G 1/4	G 1/4	10 Micron	19	22.2	18.8	25.4	11.9
47-0048-81	G 1/4	G 1/4	25 Micron	19	22.2	18.8	25.4	11.9

NEW


Over-Pressure Relief Valve

- Cartridge will open to bleed off excess pressure in the event of over-pressurization (above set point).
- Screw in cartridge adds an extra element of confidence in your self-designed systems.
- G 1/4 male connection.
- The valve is staked with a tamper proof plug.
- Vekttek recommends set point 20% higher than system pressure.
- Contact Vekttek for custom set point from factory.

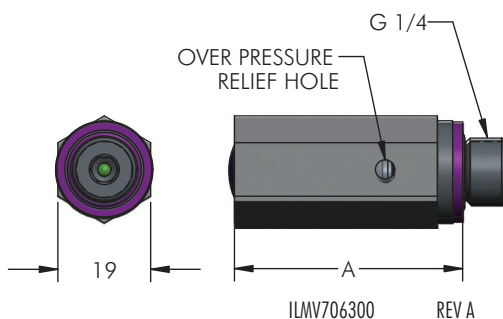

Model No.	Set Point (bar)	A (mm)
47-0638-70-31	310	61
47-0638-70-34	345	
47-0638-70-38	380	
47-0638-70-41	415	
47-0638-71-02	20	47
47-0638-71-03	30	
47-0638-71-04	40	
47-0638-71-05	50	
47-0638-71-06	60	
47-0638-71-07	70	
47-0638-71-08	80	
47-0638-71-09	90	
47-0638-71-10	100	
47-0638-72-12	120	
47-0638-72-14	140	
47-0638-72-16	155	
47-0638-72-18	175	

ILMV706300 REV A

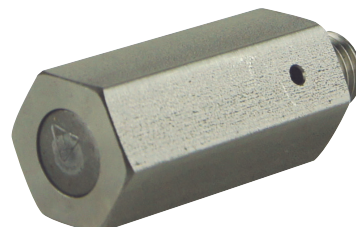

M-12