


## Compact Air/Hydraulic Pump

# NEW

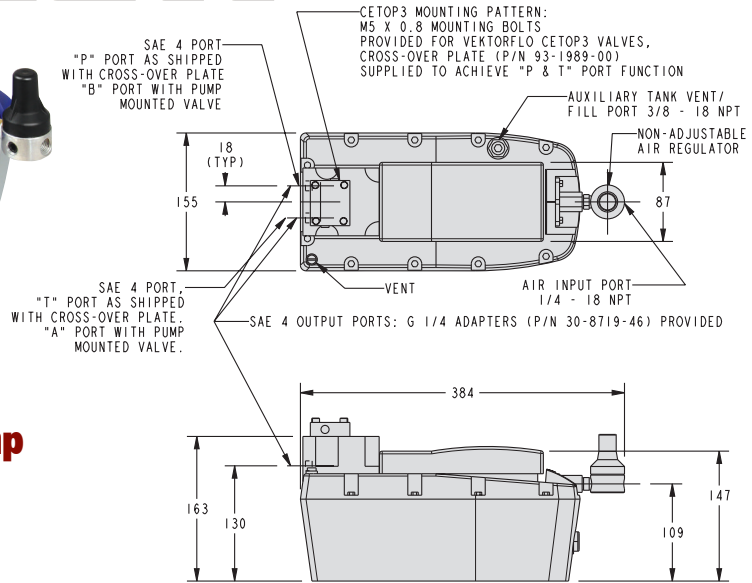

45-5820-01 VALVE MOUNTING

### Compact Air/Hydraulic Pump

- Suitable for most single fixtures and small pallet systems.
- Noise level, 75 Db. at four feet.
- Long life, shown to perform over three times longer than comparable equipment.

### Compact Air/Hydraulic Pump


Valve Needed 45-5820-01

- Suitable for operating either single or double acting systems.
- Valves can be mounted directly on the pump or remotely, no external sub-plate is necessary.

### Compact Air/Hydraulic Treadle Pump


Manual 45-5820-02

- For Single Acting Systems only.
- Control valve built-in, no external valves are required or recommended.
- Mounting hardware included.
- Easily operated by hand or foot; press to pump, press to release. Pump does not run unless treadle is pressed to activate function.

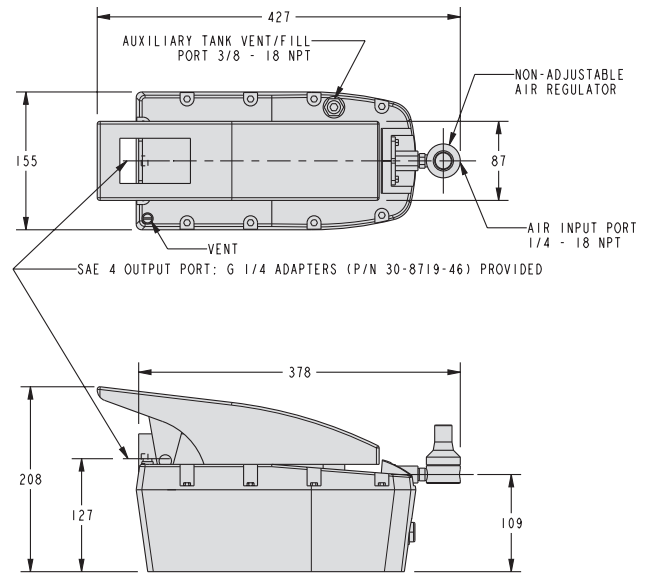

45-5820-02 MANUALLY OPERATED

ILMV455800 REV B

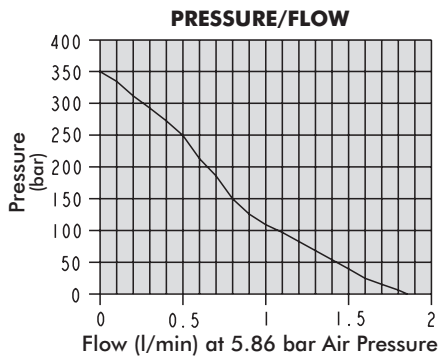

ILMV455801 REV B

Model No.	Reservoir Capacity		Air Input Pressure		Hydraulic Range	Mounting Options	Wgt
	Gross Liters	Useable Liters	Min.	Max.			
45-5820-01	Horiz. 2.4	Horiz. 2.1	2.76 bar	5.86 bar	138 to 345 bar	Horizontal (as shown) Vertical (air inlet face up)	7.4 kg
	Vertical 2.2	Vertical 1.5					
45-5820-02	Horiz. 2.4	Horiz. 2.1	2.76 bar	5.86 bar	138 to 345 bar	Horizontal (as shown) Vertical (air inlet face up)	7.4 kg
	Vertical 2.2	Vertical 1.5					

WARNING! Use of spool valves invalidates the warranty on VektorFlo® pumps

J-4