

Valves


Check Valve / Manual Valve






Push to Connect Check Valve

Model Number	P7-0030-00	P7-0030-01
Tubing	1/4	3/8
A	2.19	3.05
B	.51	.79

Maximum working pressure 145 psig.
For nylon tubing only.

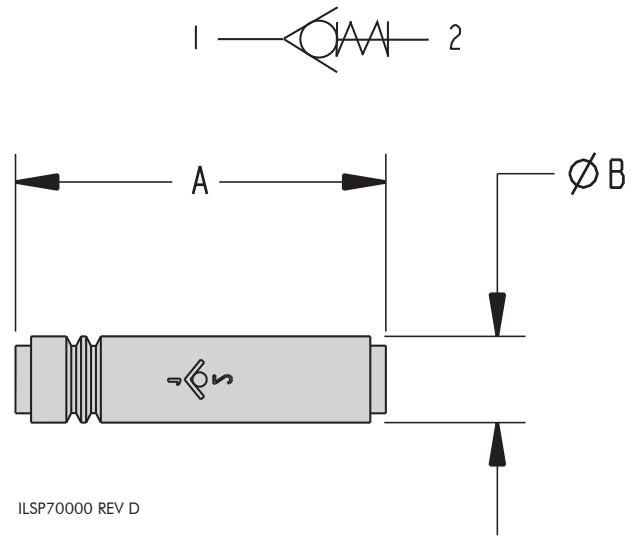

F-1

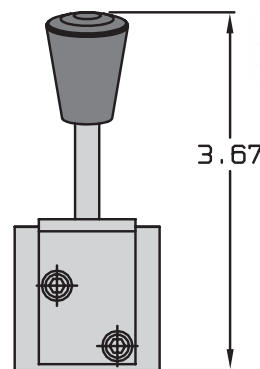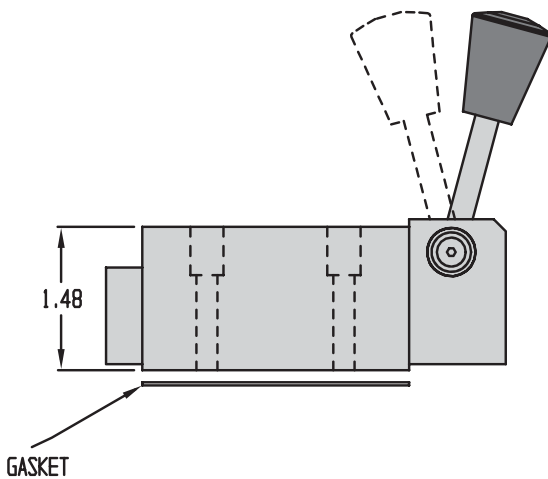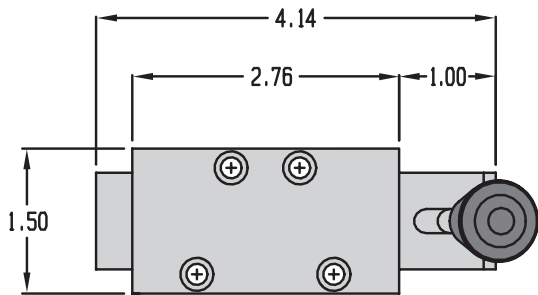

5/2 ISO 1, Manual Valve

Model Number and Specifications

P7-1030-00

OPERATING PRESSURE RANGE: 0 - 250 PSIG

CV = .50

SEAL MATERIAL: POLYURETHANE

ISO 1 MOUNTING • 2 POSITION

VALVE, MANUAL, PNEUMATIC, ISO 1, 2 POSITION

CV = .50

ILSP71000 REV C

800-992-0236

© Vektex, Inc. November 2015





5/2 Manual Valve


Model Number and Specifications

P7-1030-01

OPERATING PRESSURE RANGE: 0 - 150 PSIG
 AMBIENT TEMPERATURE RANGE: 0° - 120° F

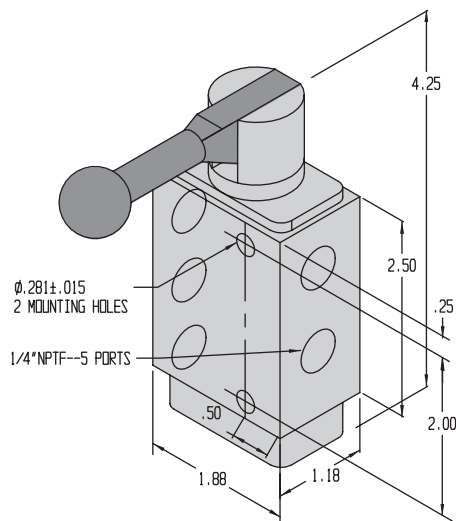

ILSP71004 REV D


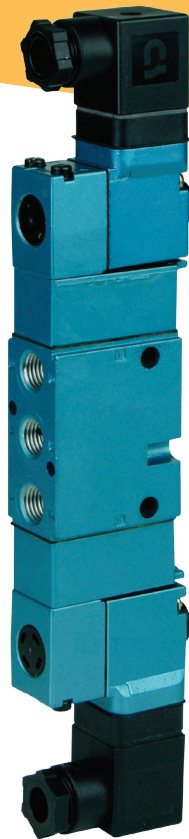


5/2 Double Solenoid Valve


Model Number and Specifications

P7-1021-02 • 120 VAC Double Solenoid Operated

OPERATING PRESSURE RANGE: 25 - 150 PSIG
 AMBIENT TEMPERATURE RANGE: 0° - 120° F

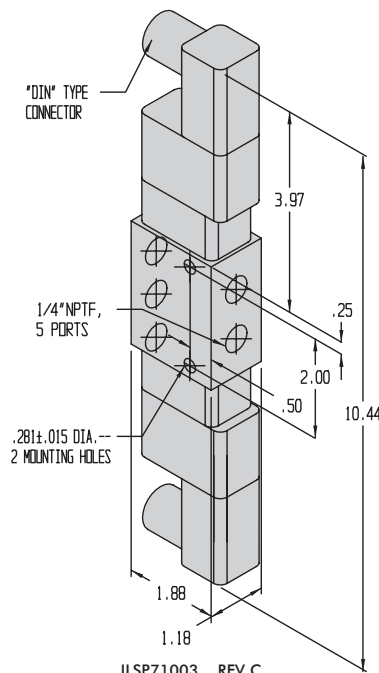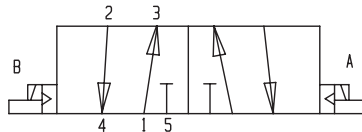

ILSP71003 REV C

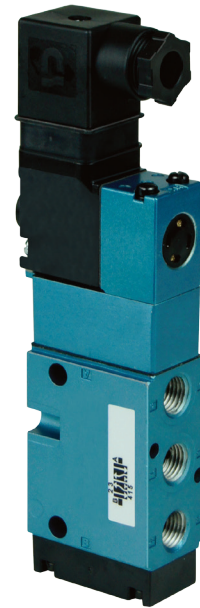



5/2 Single Solenoid Valve

Model Number and Specifications

P7-1011-00 • 120 VAC Solenoid Operated

P7-1012-00 • 24 VDC Solenoid Operated

OPERATING PRESSURE RANGE: 25 - 150 PSIG
 AMBIENT TEMPERATURE RANGE: 0° - 120° F

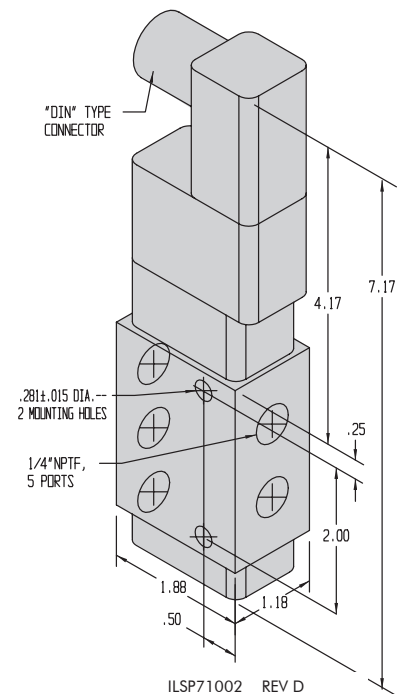

ILSP71002 REV D