

Palletized Fixture Accessories

Handle Docking Stations with optional feedback sensor

Docking Stations are now available for both 1-Handed or 2-Handed Automatic Shutoff Pallet Decoupler Handles. These handy devices provide a standard contamination-free location for quick-disconnect handle storage. Handle Docking Stations have a drain pan to keep your work area free of slip and fall hazards created by dripping disconnects.



- The optional Proximity Switch confirms the decoupler handle and hoses are connected to the docking station. The pallet can then be safely shuttled into the machine.
- Adjustable five connector positions insure these stations are ergonomically friendly for all operators.
- Couplers are BHC™ treated for long life.
- Flexible mounting allows for vertical, horizontal or pole applications.

Handle Docking Station




Decoupler Docking Station


Model No.	Proximity Switch	Model Size	A Proximity Switch Height	B Dock Width
56-0005-28	No	Two- Hand	N/A	4.37
56-0005-29	Yes	Two Hand	1.036	4.37
56-0008-01	No	One-Hand	N/A	2.95
56-0008-02	Yes	One-Hand	0.682	2.95

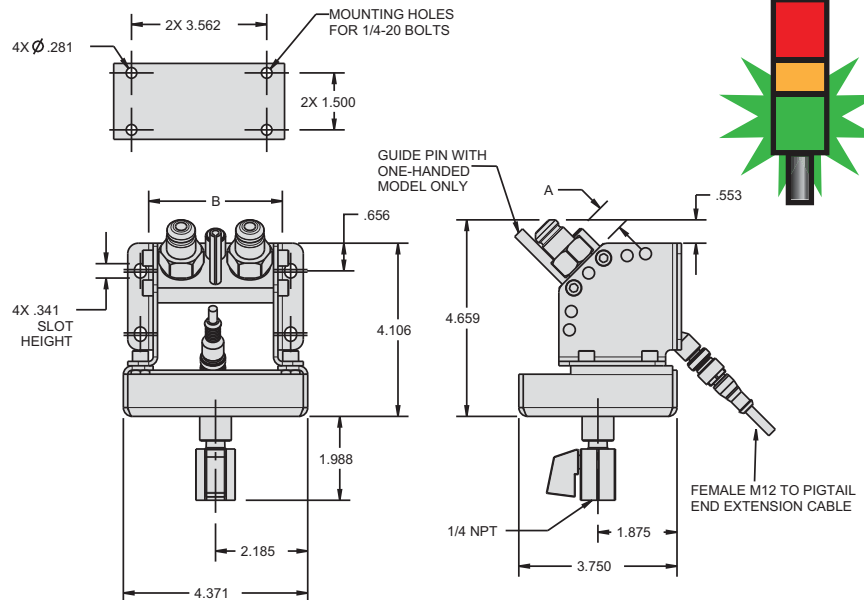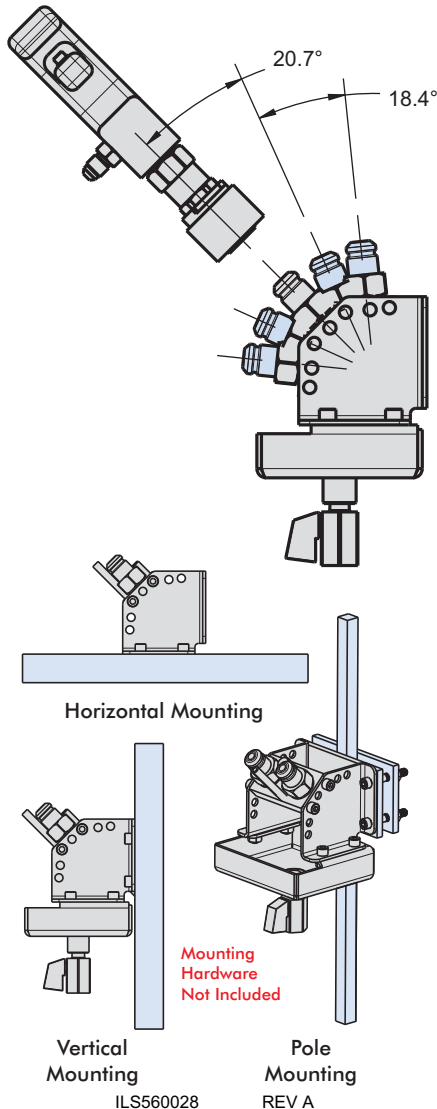


PROXIMITY SWITCH PIN OUT:



PROXIMITY SWITCH WIRE DIAGRAM



EXTENSION CABLE PIN OUT:



SENSOR FEATURE:
NORMALLY OPEN CONTACT
LED INDICATOR LIGHT
10 TO 36 VDC OPERATING RANGE
100 mA OPERATING CURRENT

PIN 1: BROWN (+)
PIN 2: WHITE (NOT CONNECTED)
PIN 3: BLACK (N/O)
PIN 4: BLUE (NOT CONNECTED)
PIN 5: GREEN/YELLOW (NOT CONNECTED)

ILS560030

REV A

