




# Accessory Valves

## Hydraulic Gauges, Over Pressure Cartridges

### Standard Pressure Gauges

- Liquid filled gauges with analog readouts.
- Available in 1,500 to 10,000 psi.
- Conform to ANSI standard B40.1 Grade B.
- SAE 4 male connection.
- Safety Glass Window.


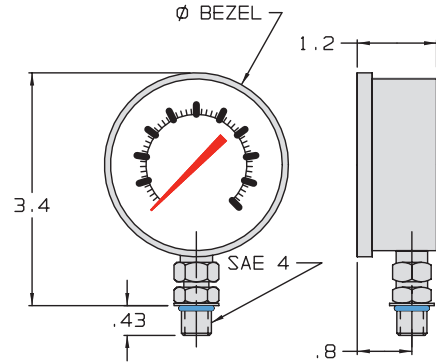


ILS722100 REV C

Model No.	Pressure Range	Bezel Diameter (in)
72-2121-37	0 to 1,000 psi	2.7
72-2121-46	0 to 3,000 psi	2.7
72-2121-52	0 to 5,000 psi	2.7
72-2121-62	0 to 10,000 psi	2.7

### Back Mount Pressure Gauges

- Liquid filled gauges with analog readouts.
- Available in 1,500, 5,000, 6,000 and 10,000 psi.
- Conform to ANSI standard B40.1 Grade B.
- SAE 4 male connection.
- Safety Glass Window.

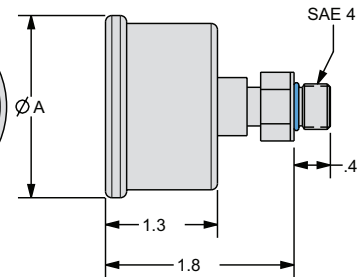




ILS721200 REV J

Model No.	Pressure Range	Bezel Diameter A (in.)
72-1221-39	0 to 1,500 psi	1.66
72-3221-55	0 to 6,000 psi	1.66
72-2121-55	0 to 5,000 psi	2.7
72-2121-65	0 to 10,000 psi	2.7

To extend the life of Pressure Gauges, run your system at no more than 75% of the gauge scale.

### Over-Pressure Relief Cartridge

- Cartridge will open to bleed off excess pressure in the event of over-pressurization (above 6,000 psi).
- Screw in cartridge adds an extra element of confidence in your self-designed systems.
- SAE 4 male connection.
- Valve is staked with a tamper proof plug.
- Recommended set point 20% higher than system pressure.
- Contact Vekttek for custom set point from factory.

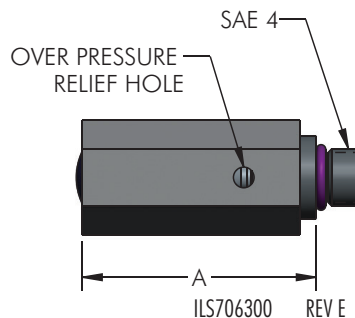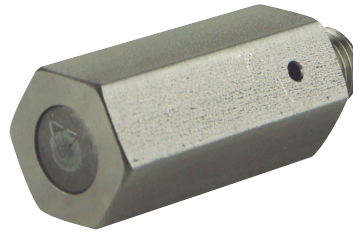

ILS706300 REV E

Model No.	Set Point (psi)	A (in)
70-6336-70-45	4500	1.64
70-6336-70-50	5000	
70-6336-70-55	5500	
70-6336-70-60	6000	
70-6336-71-03	300	
70-6336-71-04	400	1.77
70-6336-71-05	500	
70-6336-71-06	600	
70-6336-71-07	700	
70-6336-71-08	800	
70-6336-71-09	900	
70-6336-71-10	1000	
70-6336-71-11	1100	
70-6336-71-12	1200	
70-6336-71-13	1300	
70-6336-71-14	1400	
70-6336-71-15	1500	
70-6336-72-18	1750	
70-6336-72-20	2000	
70-6336-72-23	2250	
70-6336-72-25	2500	

ILS706300 REV E

M-18