

N/A	N/A	ISMV1007	INSTRUCTION SHEET			
N/A	N/A	61100521	KIT, SPRING			
N/A	N/A	6V100520	KIT, SEAL, FKM			
N/A	N/A	60100002	KIT, SEAL, STANDARD			
9	I	39V51020	O-RING, (-018)	X	X	
8	I	39V11057	WIPER,PRESS-IN, (2)	X	X	
7	I	81042001	STUD, SPRING, WS, SPR, 12500/55KN			
6	I	81021503	RETAINER,WS,SPR&AA,55KN			
5	I	49001904	BREATHER, 1/8 BSPP			
4	I	47042000	BASE, WS, SPR & AA, 55KN			
3	I	39001030	O-RING, (-147)	X	39V01030	
2	I	39001028	O-RING, (-136)	X	39V01028	
1	I	23313012	SPRING, COMPRESSION			X
No.	QTY	PART No.	DESCRIPTION	Included in Std. Seal Kit	Included in FKM Seal Kit	Included in Spring Kit

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED
41005005
41005005F

PARTS LIST, ASSY, WS, SPR, BM, 55KN, TOP RET.

SIZE A MPL1039

REV D

D	2965	RELEASE	JDW	01/09/16
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JDW	DRAWING STATUS: Released		
DATE:	5-30-07	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

FORM FEG035_PL_AS1ZE, REV. B

SHEET 1 OF 1

Vekttek, Inc. 1334 East Sixth Ave. P.O. Box 625 Emporia, Ks. 66801 U.S.A.	Instruction Sheet	ISMV-	1007	
		REV:	C , I.A.W. ECN2964	
		REV. BY/DATE:	JDW	01/11/16
		APPR/DATE:	GY	02/10/16
Title Assembly/Disassembly: 33kN & 55kN Spring Advance Work Supports				

Read all instructions before disassembly.

Refer to the illustration on page three for component item numbers and a tool list.

Disassembly

Notice: When disassembling multiple work supports, the plunger and body/sleeve assembly from each work support should be kept together.

To Remove Spring and Spring Retainer Seal

1. Clamp the work support base (1) in a vise.
2. With an open-end wrench on the plunger (2) and a flat blade screwdriver in the slot on the spring retainer (3) unthread. Remove the spring retainer and spring retainer seal (10) from the plunger.
3. Remove the spring (4).

To Remove Plunger Wiper

1. Clamp the work support base (1) in a vise.
2. With an open-end wrench on the plunger (2) and a flat blade screwdriver in the slot on the spring retainer (3) unthread and remove the spring retainer from the plunger.
3. Remove the spring (4).
4. Unthread and remove the spring stud (5).
5. Remove the plunger (2).
6. Remove the wiper (6) from the body/sleeve assembly (7).

Caution: Do not scratch the inner sleeve.

7. Clean all parts thoroughly and set aside to dry.

To Remove O-rings

1. Clamp the work support base (1) in a vise.
2. Unthread the body/sleeve assembly (7) from the base (1) and slide it off the plunger (2).

Caution: Use a six-point socket only. Other types of wrenches may damage the work support.

3. Remove the o-rings (8) & (9).
4. Clean all parts thoroughly and set aside to dry.

Vekttek, Inc. 1334 East Sixth Ave. P.O. Box 625 Emporia, Ks. 66801 U.S.A.	Instruction Sheet	ISMV-	1007		
		REV:	C , I.A.W. ECN2964		
		REV. BY/DATE:	JDW	01/11/16	
		APPR/DATE:	GY	02/10/16	
Title Assembly/Disassembly: 33kN & 55kN Spring Advance Work Supports					

Assembly

To Assemble Spring and Spring Retainer Seal

1. Insert the spring (4) into the plunger (2).
2. Install the spring retainer seal (10) into the threaded hole in the plunger (2). Install the spring retainer (3) into the threaded hole in the plunger (2) and with an open-end wrench on the plunger and a flat blade screwdriver in the slot on the spring retainer tighten the spring retainer to the torque specification on the parts list.


To Assemble Wiper

1. Insert the wiper (6) into the body/sleeve assembly (7).
2. Insert the plunger (2) into the body/sleeve assembly (7).
3. Insert the spring stud (5) through the plunger (2) and tighten to the base (1) at the torque specification on the parts list.
4. Insert the spring (4) into the plunger (2).
5. Install the spring retainer (3) into the threaded hole in the plunger (2) and with an open-end wrench on the plunger and a flat blade screwdriver in the slot on the spring retainer tighten the spring retainer to the torque specification on the parts list.

To Assemble O-rings

1. Lubricate all o-rings with clean hydraulic fluid. (Vekttek 65-0010-01 or equivalent).
2. Place the o-rings (8) & (9) in their respective places in the base (1).
3. Position the body/sleeve assembly (7) over the plunger (2), press it down to the base and tighten it to the torque specification on the parts list. **Note: Make certain the o-rings have not moved out of position. Caution-Use a six-point socket only. Other types of wrenches may damage the work support.**

Vekttek, Inc. 1334 East Sixth Ave. P.O. Box 625 Emporia, Ks. 66801 U.S.A.	Instruction Sheet	ISMV-	1007	
		REV:	C, I.A.W. ECN2964	
		REV. BY/DATE:	JDW	01/11/16
		APPR/DATE:	GY	02/10/16
Title Assembly/Disassembly: 33kN & 55kN Spring Advance Work Supports				

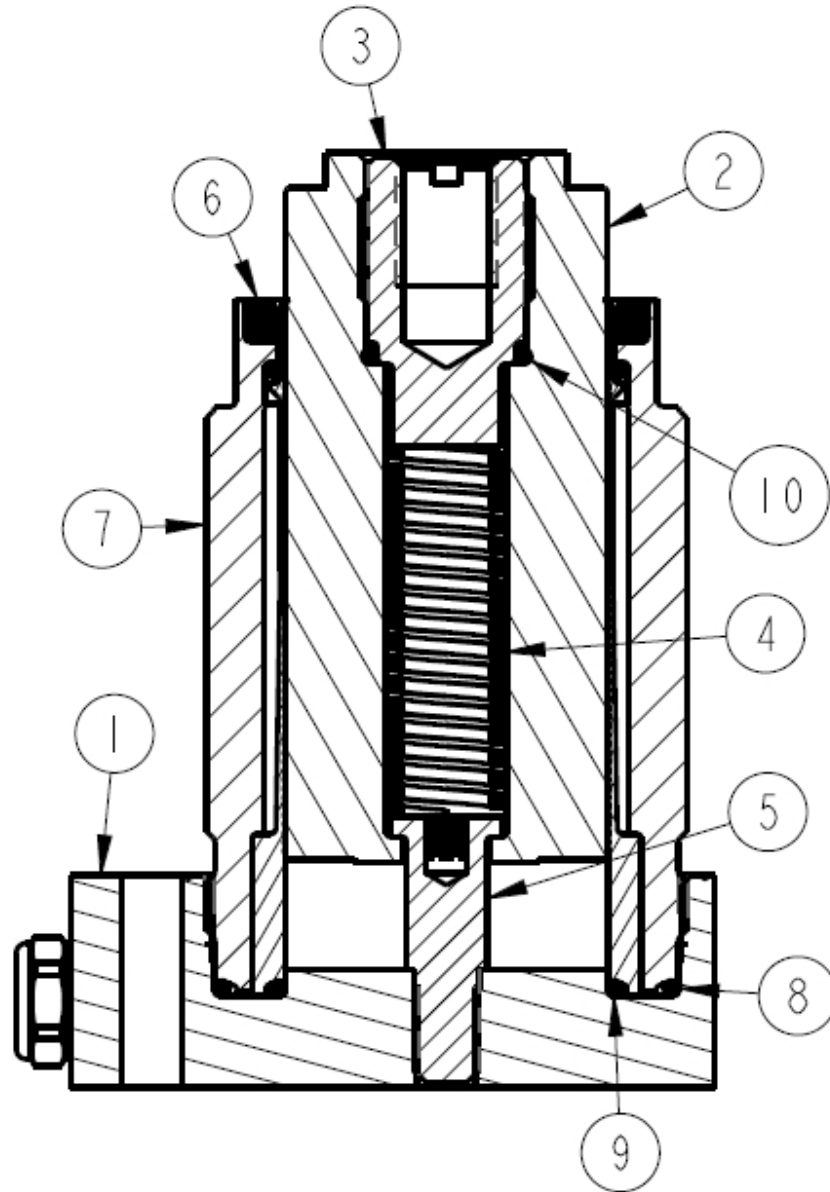

Model Number	Tools needed
41-0050-04 6964F-33	51mm socket (six pt), 3/16 hex key, 29mm open-end wrench, 17mm wide flat blade screwdriver
41-0050-05 6964F-55	70mm socket (six pt), 3/16 hex key, 42mm open-end wrench, 21mm wide flat blade screwdriver