
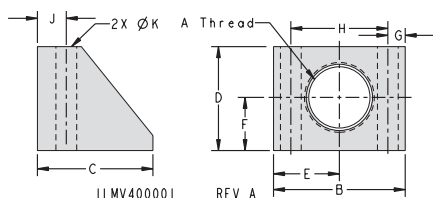



Fixadores

Fixadores de montagem


Suporte de montagem

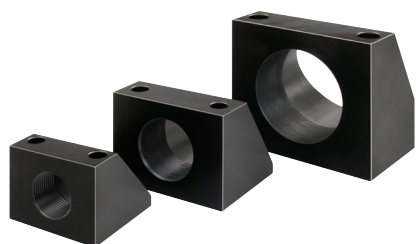

Flange de montagem

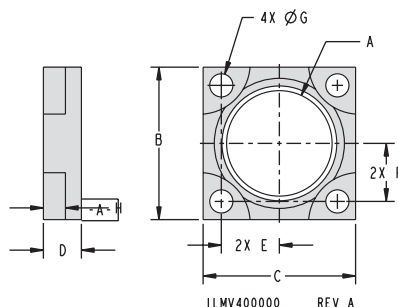

Anel de retenção

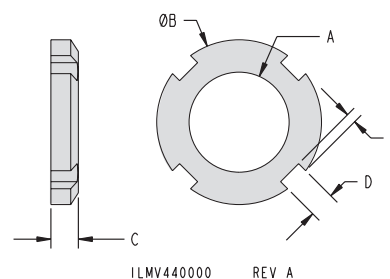

Todas as dimensões são em mm.

Suporte de montagem


Nº do modelo	A	B	C	D	E	F	G	H	J	K
44-0228-00	M28 x 1,5	57	50	45	28,5	23	7,5	42	12,5	9
44-0235-00	M35 x 1,5	64	50	50	32	25	8	48	12,5	11
44-0238-00	M38 x 1,5	76	58	58	38	29	10	56	12,5	11
44-0248-00	M48 x 1,5	86	63	63	43	32	10,5	65	16	13,5
44-0265-00	M65 x 1,5	101	76	88,5	50,5	45	10	81	16	13

Bloco de montagem



Flange de montagem

Nº do modelo	A	B	C	D	E	F	G	H
44-0128-00	M28 x 1,5	38	38	9,5	14,5	14,5	5,8	5,5
44-0132-00	M32 x 1,5	57	57	18,5	19,8	19,8	9	8,7
44-0135-00	M35 x 1,5	48	48	18,5	18,5	18,5	7	6,5
44-0138-00	M38 x 1,5	50	50	18,5	20	20	7	6,5
44-0148-00	M48 x 1,5	63	63	25	24,5	24,5	11	10
44-0165-00	M65 x 1,5	85	85	31,5	32,5	32,5	13,5	12,5
44-0180-00	M80 x 2,0	100	100	37	40	40	15	16

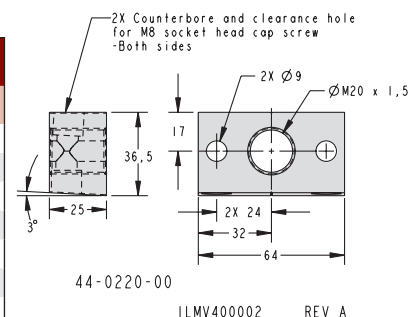

Anel de retenção

Nº do modelo	A	B	C	D	E
44-0020-00	M20 x 1,5	32	6	5,5	2,3
44-0026-00	M26 x 1,5	38	7	6,5	2,8
44-0028-00	M28 x 1,5	42	7	6,5	2,8
44-0035-00	M35 x 1,5	50	8	7	3,3
44-0038-00	M38 x 1,5	54	8	7	3,3
44-0048-00	M48 x 1,5	65	8	8	3,8
44-0065-00	M65 x 1,5	85	9	11	4,3
44-0080-00	M80 x 2,0	100	10	11	4,3



Pontos de contato esféricos

Nº do modelo	A	B	C	D	E	F
44-2106-00	M6 x 1,00	9	8	17	10	12
44-2108-00	M8 x 1,25	10	8	18	13	16
44-2110-00	M10 x 1,50	12	10	22	17	22
44-2112-00	M12 x 1,75	15	10	25	19	25
44-2116-00	M16 x 2	20	10	30	24	50
44-2120-00	M20 x 2,5	25	10	35	30	60

Os pontos de contato são temperados a dureza de 46-50 RC

Bloco de montagem

Nº do modelo
44-0220-00

